

ABA Industry, Inc.

Specification for Approval

Product Part Number

- TUR2404N70XX-S

Product Description

- U/UTP, 24AWG solid bare copper, CAT.6, CMR
- With cross filler
- With rip cord

Product Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 600 MHz.
- Reelex II carton and easy to pull out.
- Carton with one layer corrugated design providing sufficient strength and saving packaging space.


Application

- Structure cabling for horizontal and building backbone cable.
- Transmission of digital and analogue for data, video and audio applications.
- IEEE 802.3ab 1000BASE-T, 1000BASE-TX and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568-C.2 (2009)
 - ISO/IEC 11801 (Edition 2.2)
 - IEC 61156-5 (Edition 2.0)
- Flame Test
 - UL 1666 (CMR)
- Material and Construction
 - UL 444
 - CSA 22.2 NO.214
- EU Directive 2011/65/EC (RoHS2)
- EU Directive 2006/95/EC (LVD)
- CE compliance date: 2010.01.01

Sectional Drawing

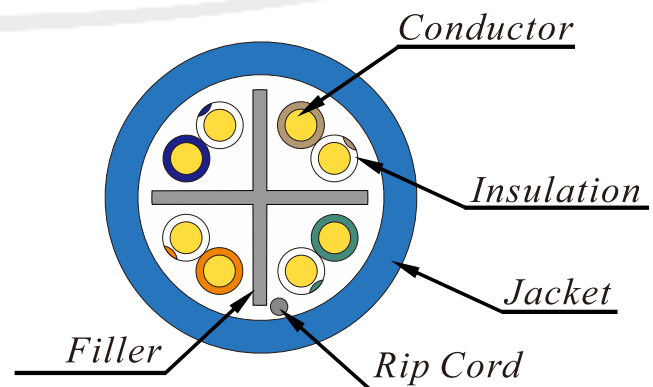

Establish Date	2014.03.01	Edition	1.1	Revised Date	2014.10.13
----------------	------------	---------	-----	--------------	------------

ABA Industry, Inc.
639 EAST WALNUT STREET
CARSON, CA 90746
NEW TELEPHONE # 310-327-7670
NEW FAX # 310-808-0778
TOLL FREE 888-534-7776

ABA Industry, Inc.

Specification for Approval

Material and Construction

Conductor	Material	24AWG solid bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white/blue Stripe	0.96 ± 0.02 mm
		Orange & white/orange stripe	0.94 ± 0.02 mm
		Green & white/green stripe	0.96 ± 0.02 mm
Brown & white/brown stripe		0.94 ± 0.02 mm	
Twisted	Description	Left hand direction	
Filler	Material	Polyolefin (PO)	
Assembly	Description	Left hand direction	
Rip cord	Material	Polyester multi-yarn	
Jacket	Material	Flame retardant polyvinyl chloride (FRPVC)	
	Diameter	5.8 ± 0.2 mm	
	Thickness	0.50 ± 0.05 mm	
	Color	Per customer's request	
Marking	ELITE 1000X CAT 6E GIGASYSTEM TESTED TO 600MHz---E142890 UTP 4PR 24AWG 75°C C(UL)US CMR---ETL & 3P VERIFIED TO TIA-568-C.2 ISO/IEC 11801 mmyy ¹ RoHS COMPLIANT XXXXFT Note 1: mmyy is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius	≥ 4 times of overall diameter	
Maximum pulling tension	≤ 110 N	

ABA Industry, Inc.

Specification for Approval

Physical & Electrical Characteristics (at 20°C)

Temperature & voltage rating	75°C / 300V
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 9.38 Ω/100m
Resistance unbalance	≤ 5%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ · m
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

Transmission Performance (at 20°C)

Frequency (MHz)	IL	NEXT	PS.NEXT	ACR	PS.ACR	ACRF	PS.ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	2.03	80.30	78.30	78.28	76.28	73.80	70.80	20.00	570.00	45.00
4	3.78	71.27	69.27	67.49	65.49	61.76	58.76	23.01	552.00	
8	5.32	66.75	64.75	61.43	59.43	55.74	52.74	24.52	546.73	
10	5.95	65.30	63.30	59.35	57.35	53.80	50.80	25.00	545.38	
16	7.55	62.24	60.24	54.68	52.68	49.72	46.72	25.00	543.00	
20	8.47	60.78	58.78	52.31	50.31	47.78	44.78	25.00	542.05	
25	9.51	59.33	57.33	49.83	47.83	45.84	42.84	24.32	541.20	
31.25	10.67	57.88	55.88	47.20	45.20	43.90	40.90	23.64	540.44	
62.5	15.38	53.36	51.36	37.98	35.98	37.88	34.88	21.54	538.55	
100	19.80	50.30	48.30	30.50	28.50	33.80	30.80	20.11	537.60	
150	24.71	47.66	45.66	22.95	20.95	30.28	27.28	18.87	536.94	
200	28.98	45.78	43.78	16.80	14.80	27.78	24.78	18.00	536.55	
250	32.85	44.33	42.33	11.48	9.48	25.84	22.84	17.32	536.28	
300	36.43	43.14	41.14	6.72	4.72	24.26	21.26	16.77	536.08	
350	39.79	42.14	40.14	2.35	0.35	22.92	19.92	16.30	535.92	
400	42.97	41.27	39.27	N.A.	N.A.	21.76	18.76	15.89	535.80	
450	46.01	40.50	38.50	N.A.	N.A.	20.74	17.74	15.53	535.70	
500	48.94	39.82	37.82	N.A.	N.A.	19.82	16.82	15.21	535.61	
550	51.76	39.19	37.19	N.A.	N.A.	18.99	15.99	14.92	535.54	
600	54.49	38.63	36.63	N.A.	N.A.	18.24	15.24	14.66	535.47	

Values above 250MHz are for information only.

ABA Industry, Inc.

Specification for Approval

Shipping Information


Item	Dimension	Nominal net weight
Cable	305 m	11.12 kg (24.51 lb)
Reelex II Carton	L386 x W270 x H370 mm	1120 g
Pallet	1150 x1150 x120 mm	14.1 kg

Container type	Capacity of pallet	Capacity of carton
20 feet	20	500
40 feet	40	1000

Shipping could use standard delivery form or per customer`s request.


Schematic Drawing of Carton

One layer corrugated Reelex II carton.




Schematic Drawing of Package

Each package of pallet delivered with plastic wrap, packing strap and paper corner protector.

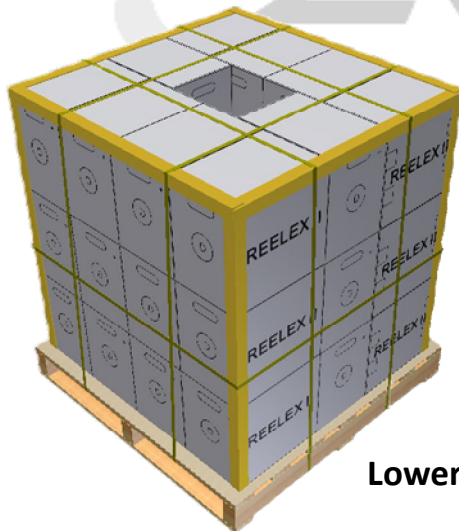

Lower Pallet

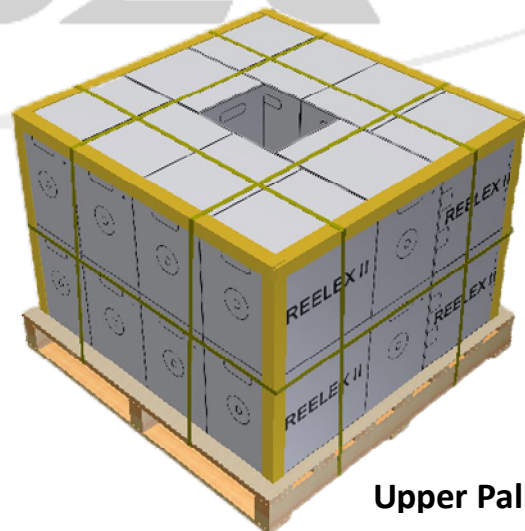

Upper Pallet

Revised Information

Edition	Revised Description	Revised Date
1.1	Revised transmission performance table. Enhanced the criteria limit.	2014.10.13